MXG 638 EXTREME

Modular Ice Machine 330 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.



MXG XL 638
Extra Large Gourmet 60 g
Ø 44 x H 46 mm



MXG L 638
Large Gourmet 39 g
Ø 38 x H 41 mm



MXG M 638
Medium Gourmet 20 g
Ø 30 x H 34 mm



MXG S 638
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1
400/50/3N

RECOMMENDED BINS

Head	Bins		kg
MXG 638	✔	**SB393**	181
	✔	**SB530**	243
	BINTOPMXGSB55	**SB550**	252
	CBT48EAMCD	**SB948**	406
	CBT52EAMCD	**SB1025**	478
	●	**UBH1600**	812
	●	**SIS1350**	613 + 73 + 73

LEGEND:
✔ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxxxxx : need additional bin top

CERTIFICATIONS

CE EAC WRAS agion LOA

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 330 kg

21 May 2020


MXG 638 EXTREME

Modular Ice Machine 330 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	

Modular Ice Machine 330 kg

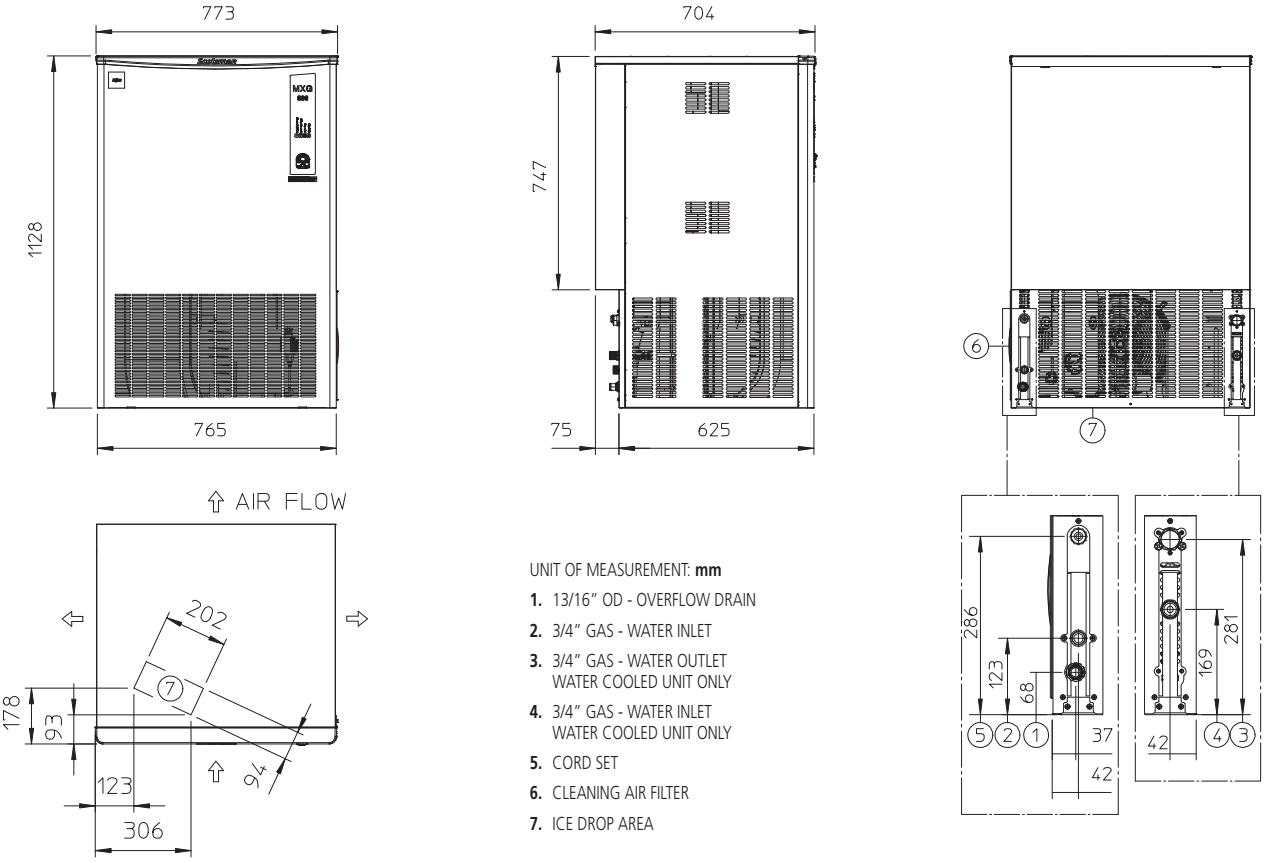

UNIT OF MEASUREMENT: **mm**

1. 13/16" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
   WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
   WATER COOLED UNIT ONLY
5. CORD SET
6. CLEANING AIR FILTER
7. ICE DROP AREA

UNIT DATA		**SHIPPING DATA**	
Size (W x D x H)	773 x 704 x 1128 mm	Carton (W x D x H)	830 x 770 x 1320 mm
Net weight	116 kg	Weight	129 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	**Voltage**	**10°C/10°C** kg	**21°C/10°C** kg	**32°C/21°C** kg	**kWh/ 100 kg**	**kWh/ 24h**	**l/h**	**W**	**W**	**No. x Ømm²**	**A**
MXGL 638 AS	230/50/1	315	310	255	20.0	50.9	41.5	2600	7390	3 x 2.5	20
MXGL 638 WS	230/50/1	290	285	250	19.8	45.5	200.0	2100	7400	3 x 2.5	20
MXGL 638 AS	400/50/3N	295	290	245	20.6	50.5	37.0	2550	7300	5 x 1.5	10
MXGM 638 AS	230/50/1	330	310	220	23.2	51.0	22.9	2500	7400	3 x 2.5	20
MXGM 638 WS	230/50/1	340	325	290	16.6	48.0	225.0	2200	7400	3 x 2.5	20
MXGM 638 AS	400/50/3N	330	310	220	23.6	52.0	42.0	2800	7300	5 x 1.5	20
MXGM 638 ASR	400/50/3N	330	310	220	23.6	52.0	27.9	2800	7300	5 x 2.5	20
MXGM 638 WS	400/50/3N	335	325	290	16.2	47.0	225.0	2200	7800	5 x 1.5	20
MXGS 638 AS	230/50/1	360	345	240	23.2	55.6	39.2	2800	7400	3 x 2.5	20
MXGS 638 WS	230/50/1	340	325	280	18.6	52.0	275.0	2300	7400	3 x 2.5	20
MXGXL 638 AS	230/50/1	260	260	210	24.8	52.0	75.0	2800	7400	3 x 2.5	20
MXGXL 638 WS	230/50/1	260	260	210	24.8	52.0	275.0	2800	7400	3 x 2.5	20
MXGL 638 AS	230/60/1	330	315	250	24.0	60.0	30.0	3100	8868	3 x 2.5	20
MXGL 638 WS	230/60/1	310	290	270	16.9	45.7	208.3	2100	5500	3 x 2.5	20
MXGM 638 AS	230/60/1	365	340	255	25.0	58.0	50.0	3200	8868	3 x 2.5	20
MXGS 638 AS	230/60/1	360	345	275	21.8	60.0	39.2	3000	5500	3 x 2.5	25
MXGS 638 WS	230/60/1	360	345	275	21.8	60.0	208.3	3000	5500	3 x 2.5	25
MXGXL 638 AS	230/60/1	260	255	215	27.7	59.5	72.5	3100	8900	3 x 2.5	25

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions